GEOS CABINET

Also available as landscape layout versions GEOS-S 5040, consult Altech.

Cat No. 710-745
GEOS-S 4050-22-o
with grey cover

Cat No. 711-745
GEOS-S 4050-22-to
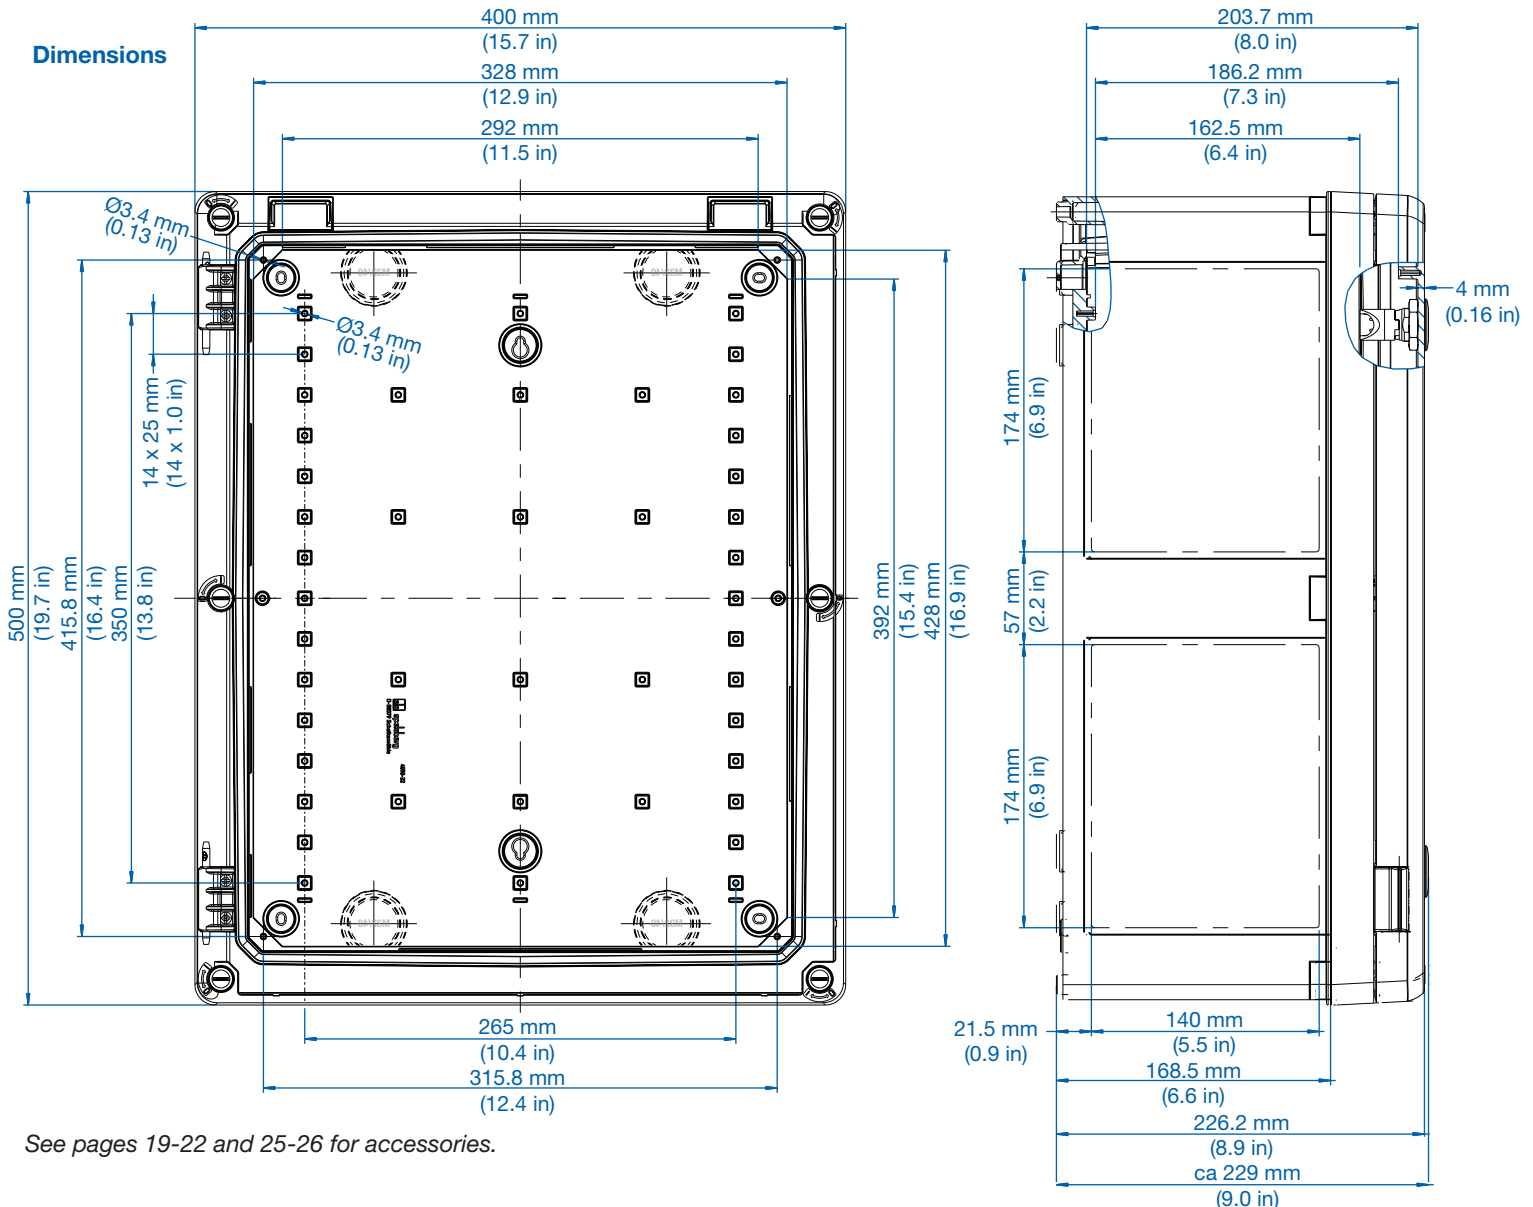with transparent cover

Description

Cabinet - Industrial Quality, suitable for installation in harsh environments and in exposed outside areas, box and frame: glass-fiber reinforced Polycarbonate, grey, similar to RAL 7035, door: Polycarbonate. Door latch: cam lock with 3mm double-bit insert (interchangeable) in accordance to DIN 43668.

E510987
UL TYPE 4X, 12K

UL EU   CE   IP67 PROTECTION

Size: 400 x 500 x 226 mm
15.7 x 19.7 x 8.9 in

without door, with frame

Dimensions

400 mm (15.7 in)
328 mm (12.9 in)
292 mm (11.5 in)
Ø3.4 mm (0.13 in)
Ø3.4 mm (0.13 in)
14 x 25 mm (14 x 1.0 in)
500 mm (19.7 in)
415.8 mm (16.4 in)
350 mm (13.8 in)
392 mm (15.4 in)
428 mm (16.9 in)
265 mm (10.4 in)
315.8 mm (12.4 in)

203.7 mm (8.0 in)
186.2 mm (7.3 in)
162.5 mm (6.4 in)
4 mm (0.16 in)
174 mm (6.9 in)
57 mm (2.2 in)
174 mm (6.9 in)
21.5 mm (0.9 in)
140 mm (5.5 in)
168.5 mm (6.6 in)
226.2 mm (8.9 in)
ca 229 mm (9.0 in)

See pages 19-22 and 25-26 for accessories.